

Newsletter No. CZ 1 – 15.5.2009

To: All International Partners
Pages: 2

Dear DEPRAG-INDUSTRIAL Associate,

We take the opportunity to inform you about new products that were added to our product line. Detailed technical information and pictures, as well as a catalog in PDF-format can be found on our website www.depragindustrial.com.

Content:
Pneumatic Drill DS 012-005PC

Model No.	Part No.
DS012-005PC	300032 A

Product Details:

The above-mentioned DI drill is mainly used for counter-sinking operations up to a diameter of 15-mm and when equipped with standard 90-degree counter sinking bits.



Features: Push to start, collet with M12 x 1, chuck range from 3 – 9.5-mm, integrated trigger for spindle-lock (assures simple mounting and removal of drill bit).

The drill DS012-005PC is an additional assortment of DEPRAG INDUSTRIAL; please ask for availability.
Official date of sale: April 1st, 2009.

Specifications:

Model			DS012-005PC
Max. power output	W	(hp)	120 (.16)
Speed (no load/max. load)	min ⁻¹	(rpm)	500 / 250
Air consumption	m ³ .min ⁻¹	(cfm)	0,3 (10.60)
I.D. of air inlet hose	mm	(in)	6 (1/4")
Rotation			right
Max. Ø of deburring	mm	(in)	15 (19/32")
Weight of tool	kg	(lbs)	0,76 (1.68)
Noise level	dB (A)		70
Rated torque	Nm		4,5
Connection thread			G 1/8"

Specifications at 90 psi (6,3 bar)

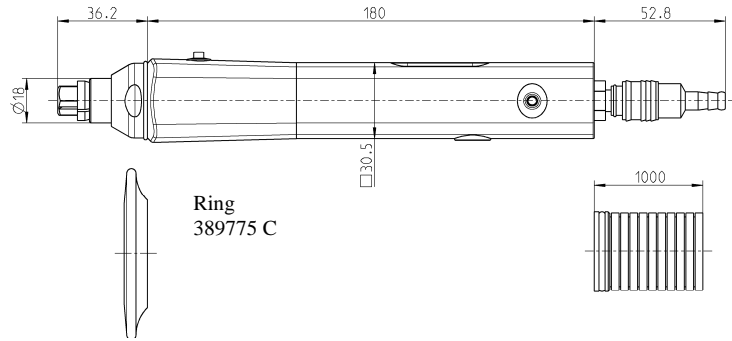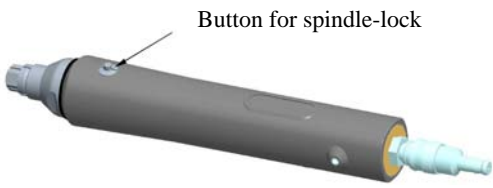

Ring
389775 C

Exhaust
Hose
389653 A

Drill – Straight Design,
Push to Start,
Model DS 012-005 PC

