

# DEPRAG

---

## INDUSTRIAL

Druckluft-Schlagschrauber

Typ PSR 10-36

SMP 140-1" XA

Drehmomente von 90 - 2100 Nm



PSR 10C



PSR 16



PSR 30  
SMP 140-1" XA



PSR 24




PSR 36



PSR 36C

## Ausführung

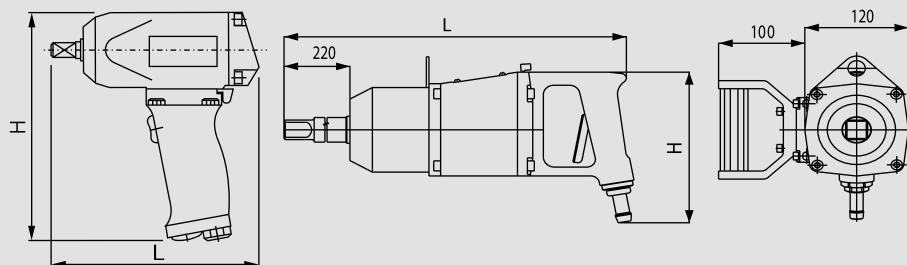

## Technische Daten

Ausführung		Pistolengriff					Faustgriff	
Typ		PSR 10 C	PSR 16	PSR 24	PSR 30	SMP 140-1" XA	PSR 36	PSR 36 C-L
Bestellnummer		826318 A	826319 A	826320 A	827143 A	830501 A	6060740A PSR 36 C 827309 A	6060730A
Für Schrauben		M 6 - M 10	M 10 - M 16	M 14 - M 24	M 16 - M 30	M 16 - M 30	M 20 - M 36	M 20 - M 36
Max. Drehmoment	Nm	90	260	680	1 400	1 400	2 100	1 450
Drehzahl (Leerlauf)	min <sup>-1</sup>	15 000	10 000	6 500	4 100	4 100	3 600	3 600
Schlagzahl	min <sup>-1</sup>	1 400	1 080	840	840	840	660	660
Luftverbrauch (Leerlauf)	m <sup>3</sup> .min <sup>-1</sup>	0,6	0,8	1,1	1,9	1,9	2,0	2,0
Abstand von Spindelmitte bis Gehäuse-Aussenkante	mm	24	32	41	53	53	60	60
Abmessungen LxH	mm	150x168	170x190	161x211	235x410	250x425	335x190	540x196
Zu/Abluftschlauch - Länge	m	2/1	-	-	-	-	-	-
Gewicht	kg	1,8	2,3	4,0	8,7	9,04	10,5	10,5
Schallpegel	dB (A)	81	85	85	90	90	90	90
Nennweite - Druckschlauch	mm	10	10	10	16	16	16	16
Luftanschluss		Nippel	G1/4"	G1/4"	RD 32	RD 32	G1/2"	G1/2"
Spindel-Aussenvierkant DIN 3121		F 12,5 (1/2")	F 12,5 (1/2")	F 20 (3/4")	F 20 (3/4")	F 25 (1")	F25 (1")	F 25 (1")

Leistungsdaten bei 6,3 bar Betriebsdruck

## Normalzubehör

Bezeichnung	Bestellnummer							
Stopfen	-	-	-	830736	-	-	-	-
Schraube M6x18	-	-	-	830737	-	-	-	-
Schlauchtülle	-	830738	830738	-	-	-	-	-
Aufhängung	830739	830740	830741	-	830742	-	-	-
Winkelschraubendreher (bei Ausf. C)	-	-	-	-	-	800447	800447	-
Schlüssel 13	6072128	-	-	-	-	-	-	-
Schlüssel 17	6072129	-	-	-	-	-	-	-
Schlüssel 19	-	6072133	-	-	-	-	-	-
Schlüssel 24	-	6074822	-	-	-	-	-	-
Schlüssel 27	-	-	6011659	-	-	-	-	-
Schlüssel 32	-	-	6011661	-	-	-	-	-
Schlüssel 34	-	-	-	6011671	-	-	-	-
Schlüssel 36	-	-	-	6011662	-	-	-	-

## Optionales Zubehör

Bezeichnung	Bestellnummer							
Zuluftdrossel OMP Js8/Ø23	830743	830743	830743	-	-	-	-	-
Schlüssel	10; 12; 16	16; 17; 18; 21; 22	24; 30; 34; 36; 41; 46	41; 46	41; 46; 55	41; 46; 50; 55	41; 46; 50; 55	41; 46; 50; 55